RADC-TR-71-286
Technical Report
October 1971

AD 734074

INVESTIGATION OF 10.6 MICRON PROPAGATION PHENOMENA
(2880-5)

The Ohio State University

ElectroScience Laboratory
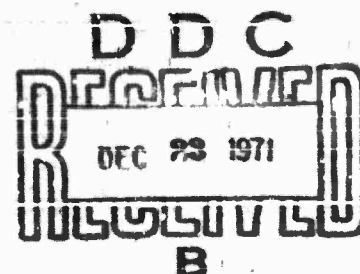
Department of Electrical Engineering
Columbus, Ohio 43212

DDC

RECEIVED

DEC 23 1971

B

Rome Air Development Center
Air Force Systems Command
Griffiss Air Force Base, New York

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related government procurement operation, the government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished. or in any way supplied the said drawings, specifications, or othe data is not to be regarded, by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY *(Corporate author)* The Ohio State University ElectroScience Laboratory, Department of Electrical Engineering, Columbus, Ohio 43212	2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
	2b. GROUP	

3. REPORT TITLE

INVESTIGATION OF 10.6 MICRON PROPAGATION PHENOMENA
(2880-5)

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
Quarterly Report 8 July 1971 to 8 October 1971

5. AUTHOR(S) *(Last name, first name, initial)*

Dr. William G. Swarner

6. REPORT DATE 8 October 1971	7a. TOTAL NO. OF PAGES 11	7b. NO. OF REFS 4
8a. CONTRACT OR GRANT NO. F30602-70-C-0003 b. Job Order No. 12790000 c. ARPA Order No. 1279 d.	9a. ORIGINATOR'S REPORT NUMBER(S) ElectroScience Laboratory 2880-5 9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)* RADC-TR-71-286	

10. AVAILABILITY/LIMITATION NOTICES

Approved for public release; distribution unlimited.

11. SUPPLEMENTARY NOTES Monitored by: Raymond J. Urtz, Jr. RADC (OCSE), GAFB NY 13440	12. SPONSORING MILITARY ACTIVITY Advanced Research Projects Agency Arlington, VA 22209

13. ABSTRACT

This report summarizes technical details of work performed at The Ohio State University ElectroScience Laboratory during the period 8 July 1971 to 8 October 1971.

Progress is reported on the construction and testing of apparatus and the development of computer software for experiments in imaging and image restoration at 10.6 microns. The initial experiment involves recording, in digital format, the atmospherically degraded images of a pair of point sources with subsequent computer processing for image restoration and determination of isoplanatic patch size for various atmospheric conditions.

Recent additions to the experimental equipment are described and samples of images recorded and reproduced via the Miller code digital magnetic tape recording system are presented.

DD FORM 1473
I JAN 64

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
10.6 MICRONS Atmospheric Imaging Image Restoration Propagation Turbulence Image Scanning						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor),* also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through

_____."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through

_____."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through

_____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as *(TS), (S), (C),* or *(U).*

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

PUBLICATION REVIEW

This technical report has been reviewed and is approved.

RADC Project Engineer

ii

ABSTRACT

This report summarizes technical details of work performed at The Ohio State University ElectroScience Laboratory during the period 8 July 1971 to 8 October 1971.

Progress is reported on the construction and testing of apparatus and the development of computer software for experiments in imaging and image restoration at 10.6 microns. The initial experiment involves recording, in digital format, the atmospherically degraded images of a pair of point sources with subsequent computer processing for image restoration and determination of isoplanatic patch size for various atmospheric conditions.

Recent additions to the experimental equipment are described and samples of images recorded and reproduced via the Miller code digital magnetic tape recording system are presented.

CONTENTS

I.   INTRODUCTION

This is the fifth technical report on Contract No. F30602-70-C-0003 entitled "Investigation of 10.6 Micron Propagation Phenomena." This report covers the period 8 July 1971 to 8 October 1971.

This program initially provided theoreti- ¹ backup information to the RADC Atmospheric Optical Propagation St. ies Program and is currently centered on the study of atmospheric imaging and restoration of atmospherically degraded images at 10.6 microns. The general aim is to provide initial attempts at restoration, to determine potential problems, and to obtain initial data useful for preliminary systems design. For this purpose a system is being completed and tested which will record two 10.6 micron images simultaneously at 200 frames per second, perform image restoration via computer analysis, and display the restored images.

Primary effort during the past three months has been devoted to completing and testing the 10.6 micron imaging detector and the Miller code magnetic tape recording and playback system, and converting computer software for operation on the ElectroScience Laboratory's new DC6024 computer. Design of an interface between the serial digital (Miller code) recorder and the DC6024 computer for reduction of data pre-recorded at RADC has also been initiated.

II.   IMAGING AND IMAGE RESTORATION APPARATUS

A. Description

The basic experiment to be performed following completion and testing of the infrared imaging system involves simultaneous recording of two atmospherically degraded laser beams.[1] The image received from one beam will be processed to obtain the atmospheric MTF which will then be applied to restore the degraded image received from the second beam. Preliminary tests of this process have been successfully performed using data obtained from an analog display of one channel of the scanning detector.[2] Information on isoplanatic patch size will also be obtained by varying the spacing between the two beams and noting the effects on image restoration and by studying the correlation between the two images as a function of beam separation. Later experiments involving reflected images from real objects using a point source reference, and finally, using edge effects in an image to eliminate the need for a reference beam are also planned.

A simplified block diagram of the image restoration experiment is given in Fig. 1. Two 10.6 micron sources having variable separation are obtained by splitting the output of a 10.6 micron laser into two beams which are then directed toward the receiving telescope by two movable mirrors having the desired separation. Atmospherically degraded images (degraded airy disc patterns) of these sources are

1

INVESTIGATION OF 10.6 MICRON PROPAGATION PHENOMENA
(2880-5)

Dr. William G. Swarner

Principal Investigator: Dr. William G. Swarner
                Phone: 614 422-6677

Project Engineer: Raymond P. Urtz, Jr.
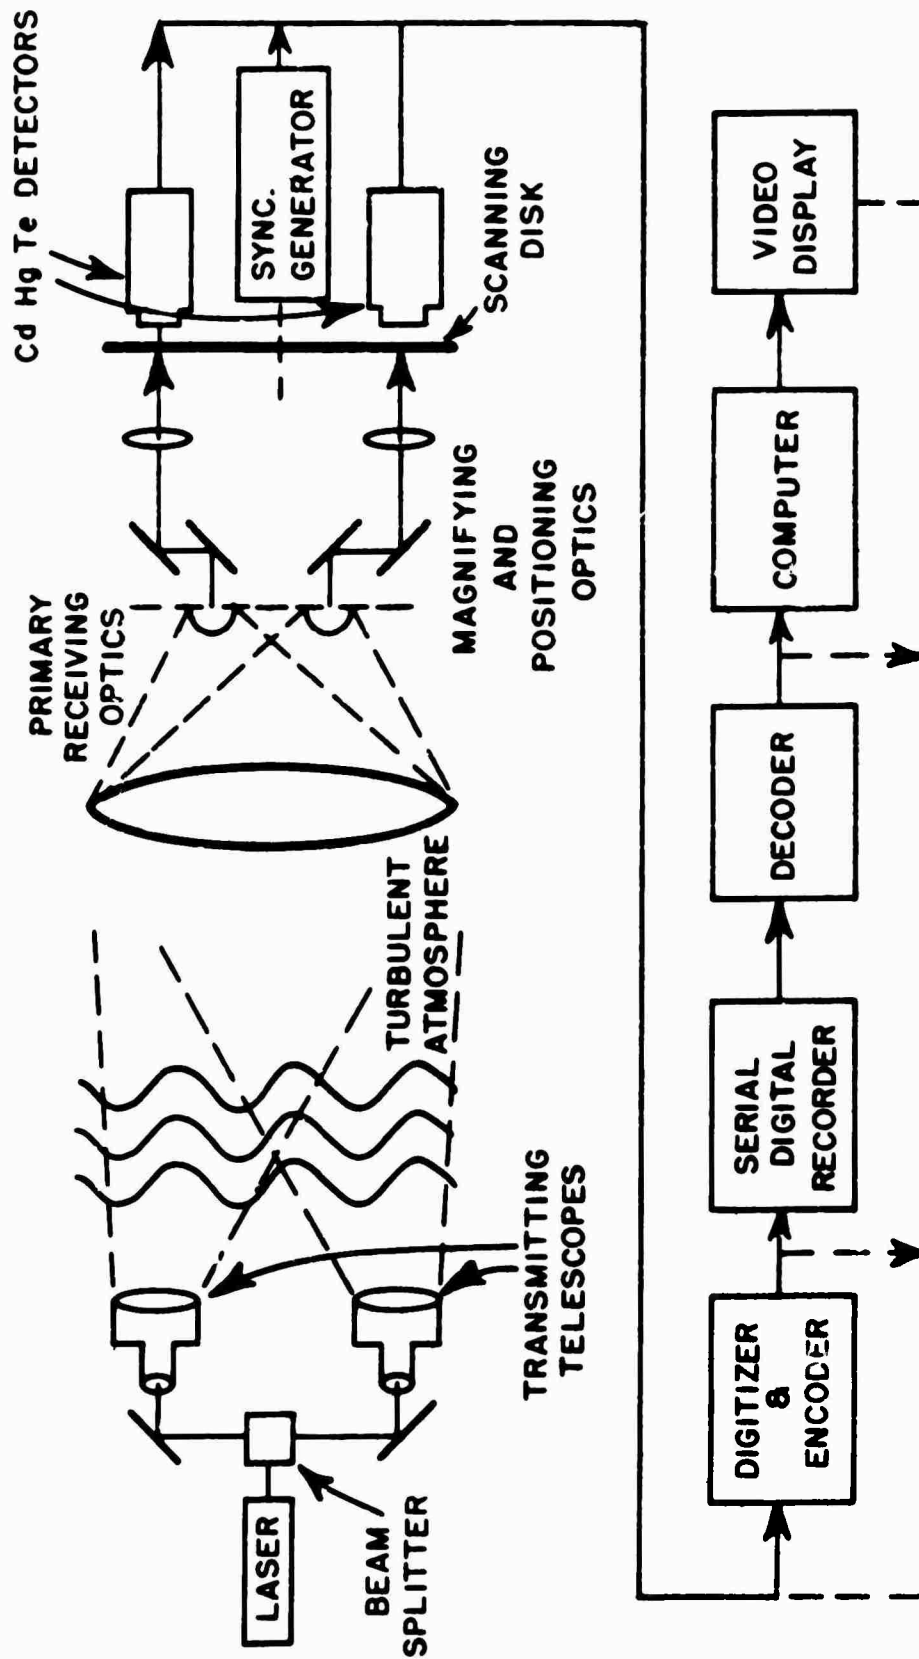   Pnone: 315 330-3443

Fig. 1. Image Restoration Experiment.

formed at the primary image plane as shown. Desired portions of these images are then selected, magnified by 1, 2, or 4, as appropriate for the turbulence conditions present and are refocused onto opposite sides of the scanning disc which contains two identical sets of scanning apertures so that both images are scanned simultaneously. Infrared detectors mounted behind the scanning disc convert the infrared energy into electrical (video) signals for recording and subsequent processing. Synchronization signals are also required in order that the video data can be properly identified with respect to location within the image. These are generated as described below. Details of the optical system and of the signal processing electronics have been given in a previous report.[3]

Synchronizing signals for controlling the digitization, recording, and reconstruction of the video signals are obtained from the scanning disc as indicated in Fig. 2. Two 20 line reticles are projected onto the scanning disc using a position approximately 90° away from the IR detector. As a hole passes in front of a reticle line, a photomultiplier receives the signal and delivers a pulse to the synchronizing electronics.

The reticles are positioned with respect to successive holes in the disc such that a pulse is produced by one detector corresponding to each odd-numbered data word of the image being scanned, while the other detector produces a pulse for each even-numbered word. These pulses are then shortened and combined to form the complete A channel word sync pulse train and, via a delay, the B channel word sync pulse train. (Note that it is not possible to generate the complete word sync pulse train by means of a 40 line reticle and single detector since the scanning hole diameter is equal to the word spacing and successive pulses would overlap. Smaller holes could theoretically be used to generate the required sync pulses in this manner but would be extremely difficult and costly to drill and to position with the required accuracy.)

Two additional holes are diametrically located on the periphery of the scanning disc for generating frame sync and a third hole is located near one frame sync hole to provide disc sync (i.e., a method for determining which half of the disc scanned a particular image). A separate line source projector and photomultiplier are used for these signals. This line source and detector also operate in conjunction with the 80 scanning holes to produce line sync. The detector output is thus a combination of line, frame, and disc sync pulses which are then separated by the synchronization electronics. Coarse adjustment of the sync pulse timing is accomplished by movement of the reticle projector, while fine adjustments may be made via delay gates within the sync electronics.

Details of the digitizer and encoder, serial digital recorder, and decoder of Fig. 1 have been given previously.[3] Basically, the video signals from the A and B channel detectors are multiplexed,
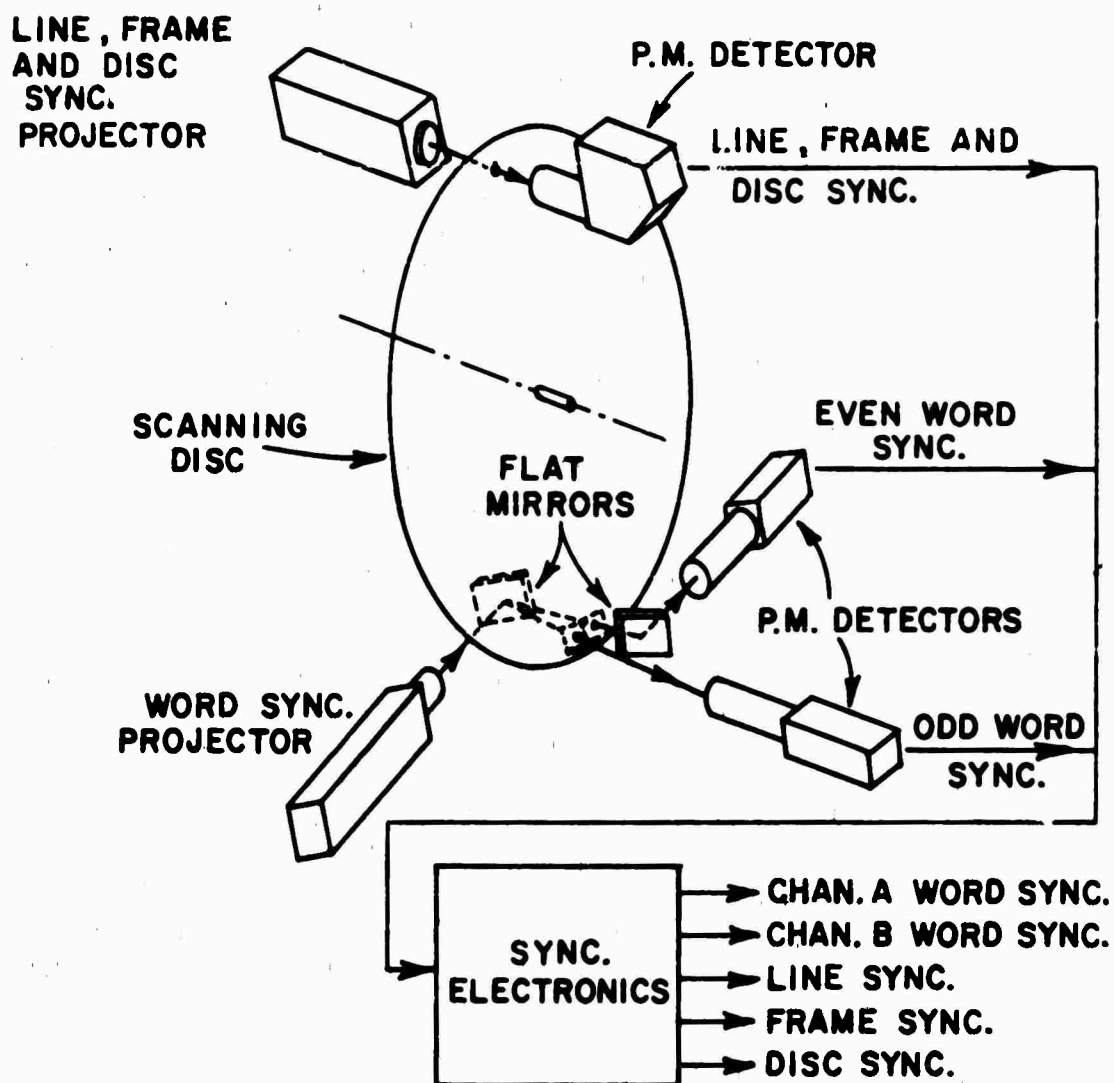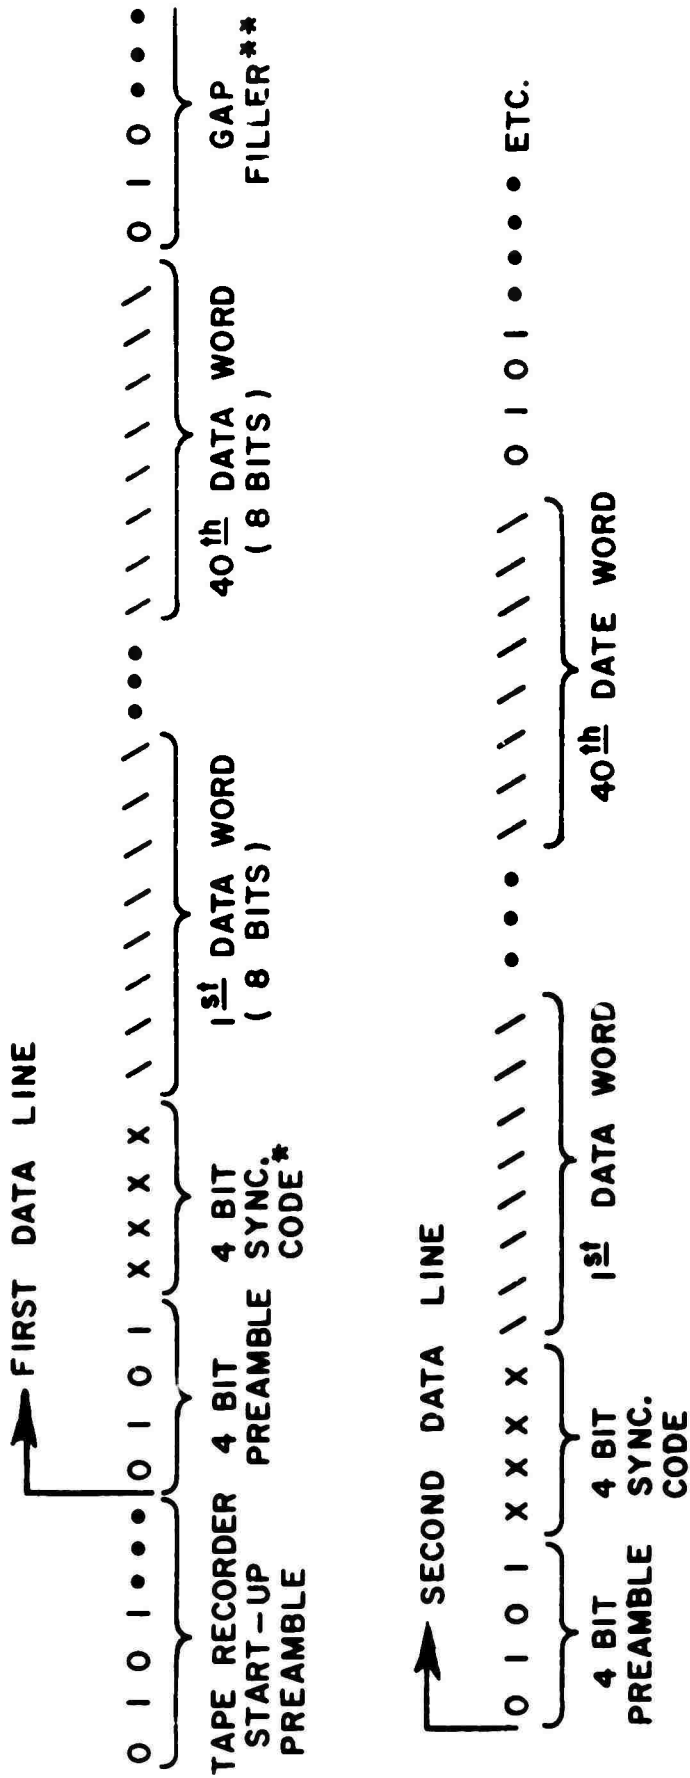
3

Fig. 2. Scanner Synchronization System.

digitized, demultiplexed, converted to serial form, and are then com-
bined with the necessary sync signals so that the output from each
channel may be recorded on a single track of the serial digital (Miller
Code) tape recorder.

The serial coding technique used for this purpose is illustrated
by Fig. 3. A preamble of 0101··· code is first recorded in order that
the Miller code decoder clock can be synchronized during playback prior
to arrival of the first actual data. (The 101 sequence is unique in
the Miller code system and is used for clock synchronization.[4]) Each
data line then begins with a 4-bit (0101) preamble to maintain clock
synchronization followed by a 4-bit sync code from which line and
frame sync and recording mode used are extracted during playback.
Actual video data words for the corresponding image line are then
recorded in succession. Following the 40th (last) data word of the
line a gap filler code (0101···) is recorded until data for the
following line becomes available. Output of the encoder is synchronous
(as required for reliable operation of the Miller code system) at a
fixed, crystal-controlled frequency of 2.716 Megabits per second, while
input is asynchronous, both because of the variable word rate from line
to line used to obtain equal line lengths from the scanning disc,[3]
and because of possible variations in disc speed. Hence the gap filler
code, which varies in length as required, is needed. Since the 0101
sequence is used for this code it also aids in clock synchronization.

The particular four bit sync codes used (see Fig. 3) can be
uniquely identified and precisely located within a string of 0101's
(which they always follow) hence detection of one of these by the
decoder during playback signifies the beginning of a data line. Word
sync pulses used to extract the data and generate a CRT raster for
display are then obtained via a data bit counter. The sync code
detectors are gated off during data word input so that if these 4-bit
combinations are present within the data stream they will not produce
false sync pulses at the decoder output. Following reception of the
40th data word plus two extra bits (to allow for possible errors in
the data bit count) the sync code detectors are gated on again, and,
when the next 4-bit sync code is detected, the bit counters are reset
and the cycle is repeated for the next data line.

The serial encoder and decoder described above utilize standard
NRZ (non return to zero) binary code. This is not suitable for direct
magnetic tape recording, however, because of the DC response required,
the undesirable spectral density (which peaks at dc), and the inability
to extract a clock for decoding from a single channel of recorded data.
Hence for the actual recording process the NRZ data is converted to
Miller code which effectively eliminates these difficulties.[4]
Characteristics of the Miller code are compared with the standard NRZ
data format in Fig. 4. The spectral density of typical Miller coded
data closely approximates that which is available on a standard direct
record channel of an instrumention magnetic tape recorder, hence
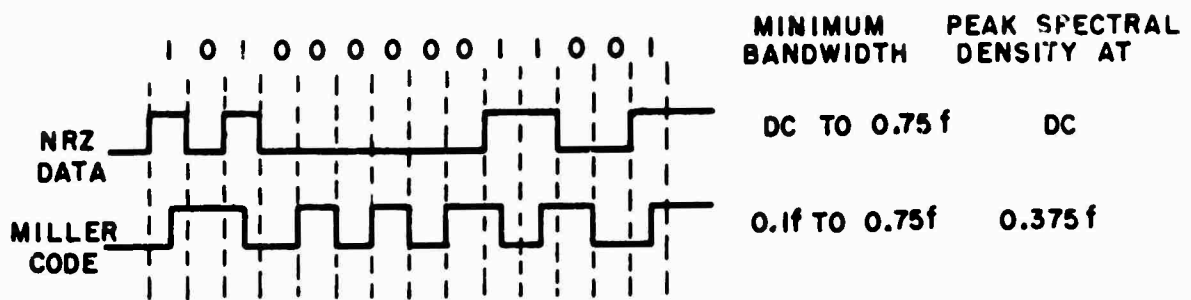capabilities of the recorder are fully utilized and very high bit

FIRST DATA LINE

O I O I ••• O I O I X X X X / / / / / / / / ••• / / / / / / / / O I O ••• •

| TAPE RECORDER START-UP PREAMBLE | 4 BIT PREAMBLE | 4 BIT SYNC. CODE* | 1st DATA WORD (8 BITS) | 40th DATA WORD (8 BITS) | GAP FILLER** |

SECOND DATA LINE

O I O I X X X X / / / / / / / / ••• / / / / / / / / O I O I ••• ETC.

| 4 BIT PREAMBLE | 4 BIT SYNC. CODE | 1st DATA WORD | 40th DATE WORD |

* SYNC CODES

OOOO = LINE SYNC

OOII = FRAME SYNC., 8 DATA BIT MODE

IIOO = FRAME SYNC., 7 BIT + PARITY MODE

** GAP FILLER = AN EVEN NO. OF OIOI••BITS (NORMALLY IO TO I2 BITS)

Fig. 3. Serial Coding Technique.

6

	MINIMUM BANDWIDTH	PEAK SPECTRAL DENSITY AT
NRZ DATA	DC TO 0.75 f	DC
MILLER CODE	0.1f TO 0.75f	0.375 f

MILLER CODE DEFINITION

1 = TRANSITION IN CENTER OF BIT CELL

00 = TRANSITION AT END OF 1st O'S BIT CELL

Fig. 4. Miller Code Format.

densities (22.6 K bits/in. for the present system) can be achieved. Also, as mentioned earlier, the 101 sequence is unique in the Miller code, having a period exactly two bit cells in length, and can be used to extract the clock required for decoding from the recorded data.

B. Current Progress

The two-channel infrared scanner package and associated control and display console are nearly completed. The temporary relay lens used in the scanner for initial tests has been removed and the disc and detector mounts have been completely rebuilt to achieve a simpler, more rugged, vibration-free mount. The temporary sync projectors and detectors have also been replaced and the associated electronics have been revised as described in the previous section of this report. A rim has been added to the scanning disc to eliminate buckling of the thin disc edges and provisions for dynamically balancing the entire motor and disc assembly are now being incorporated. A control package housing scanner controls, indicators and a viewing scope has been added to the scanner package. Cross-hair alignment targets, retractable via a stepping motor, have been installed, and remote gain controlled linear video amplifiers have been designed and constructed and are now being installed. All analog-to-digital and digital-to-analog converters, multiplexer and demultiplexer, parallel to serial encoders, and serial data decoders have been installed and successfully tested. Several circuit boards are now being revised to incorporate temporary changes made during the debugging and testing phase.

Alignment and testing of the Miller code digital recording equipment is now in progress. The complete system has been successfully operated in real time (i.e., recording and playback at 120 ips.).

7

Examples of test images obtained are given in Fig. 5. These show a silhouette of the cross-hair alignment target produced by illuminating the input aperture of the scanning detector with 10.6 micron laser radiation. Images recorded using magnifications of 1, 2, and 4 are included in Fig. 5. Irregularities in illumination in these images are caused by varying mode patterns of the incident laser beam. Successful playback, decoding and display of the recorded images at reduced speed (15 ips. and 7-1/2 ips.) which will be required for subsequent computer processing of recorded data has not yet been achieved. Reasons for this difficulty are now being investigated.

Anodizing of aluminum components, final alignment, and installation of dust covers, name plates, cable markers, and hoisting rings will then be performed prior to shipment of the scanning detector control console, and recorder to RADC for data recording. The Ohio State University playback, display, and computer interface will then be completed in preparation for data analysis.


III. DATA PROCESSING

The computer software necessary to restore an atmospheric turbulence degraded 10.6 micron image has been developed and demonstrated. The program flow diagram and three dimensional intensity plots of an actual point spread function and turbulence degraded image (computer program inputs) and the subsequent restored image (program output) are all presented in a previous technical report.[2] The computer software was originally written for the Ohio State University IBM360/75 computer; however, at the present time this software package is being converted for use on the ElectroScience Laboratory's Datacraft DC6024/3 computer. In addition to the convenience of the inhouse computer facility and the direct computer interface link with the ElectroScience Laboratory's 10.6 micron data playback and decoding system, this change in computer systems will allow the analysis of a sufficient number of data runs to cover a meaningfully wide range of turbulence conditions.

Effort has recently been directed toward providing the necessary software and hardware to complete the data link previously mentioned. Once completed, this link will make it possible to decode a Miller code tape recorded at the RADC Verona PATS test site and store the data on a DC6024/3 computer compatible 9 track digital tape for further processing.
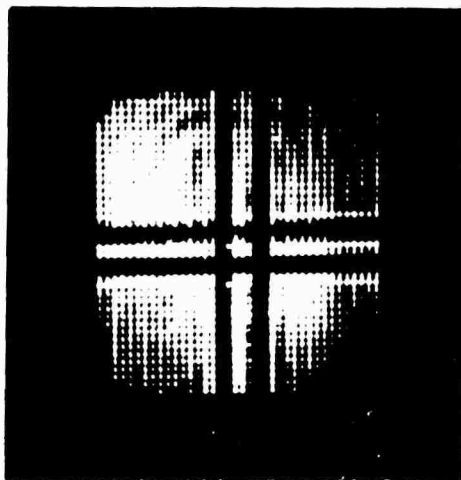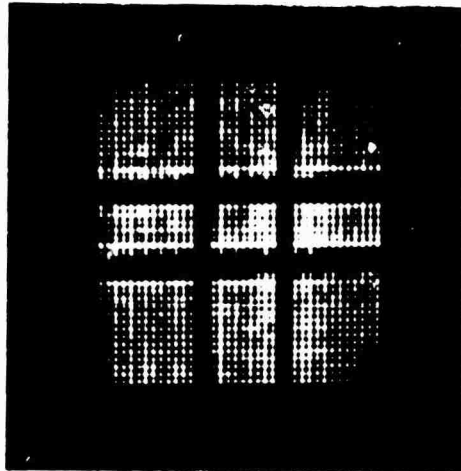
a. 1:1 Magnification   b. 2:1 Magnification   c. 4:1 Magnification

Fig. 5.   Test images of the alignment target illuminated by a 10.6 micron laser beam.

IV. SUMMARY

This report has described work performed during the last three
months in completing and testing the infrared scanning detector and
Miller code recording system to be used for atmospheric image restor-
ation experiments and in converting the present image restoration
computer software for use on the ElectroScience Laboratory's DC6024
computer. Modificaticns of the scanner synchronization and video
systems are described and serial coding techniques used for digital
video recording are presented. System tests including image scanning,
digitizing, serial encoding, recording, playback, decoding, and display
are reported, and examples of test images obtained during these tests
are given.

REFERENCES

1. "Investigation of 10.6 Micron Propagation Phenomena," (Semi-annual Report), Report 2880-1, March 1970, The Ohio State University ElectroScience Laboratory, Department of Electrical Engineering; prepared under Contract F30602-70-C-0003 for Rome Air Development Center. (AD 869 474)

2. "Investigation of 10.6 Micron Propagation Phenomena," (Semi-annual Report), Report 2880-4, October 1971, The Ohio State University ElectroScience Laboratory, Department of Electrical Engineering; prepared under Contract F30602-70-C-0003 for Rome Air Development Center.

3. "Investigation of 10.6 Micron Propagation Phenomena," (Semi-annual Report), Report 2880-3, February 1971, The Ohio State University ElectroScience Laboratory, Department of Electrical Engineering; prepared under Contract F30602-70-C-0003 for Rome Air Development Center.

4. Booye, Martin A., "An Engineering Evaluation of the Miller Coding in Direct PCM Recording and Reproducing," Instrumentation Engineering Dept., Ampex Corporation.